

Safety Protection Products

Safety Protection Products



2018



Protects vehicles and people from impact by collision.
Excellent in workability and durability.

Corner Guard



For Corner → 2p

NPC type (For shape right angle)

NPO type (For chamfer right angle)

Wall Bumper



For Wall → 3 ~ 4p

NCD type (Hollow section type)


NCD-Y type (Hollow section with high visibility type)

NCD-MK type (High durability type with slits)

NCD-M type (High durability type)

NCK type (Square hollow section type)

Edge Guard

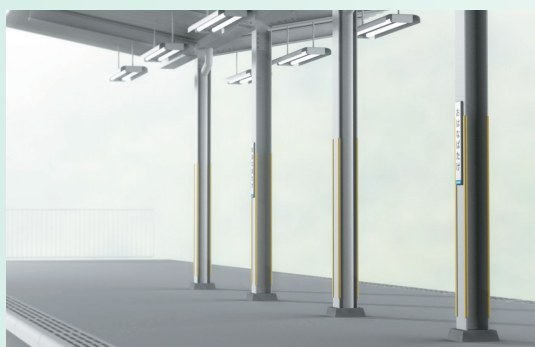

For I-Beam Column → 5p

NH type


NPC type




Specifications

Material / Soft Resin
Backing / Aluminium A6063S-T5

Color Variation


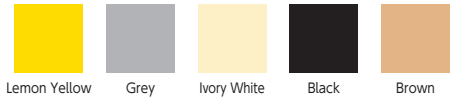


Section

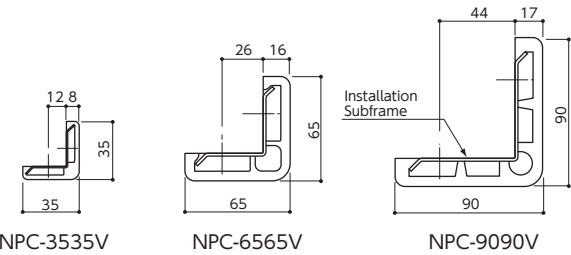

Model No.	Length (mm)
NPC-3535V	1,000
	2,000
NPC-6565V	1,000
	2,000
NPC-9090V	1,000
	2,000

Backing

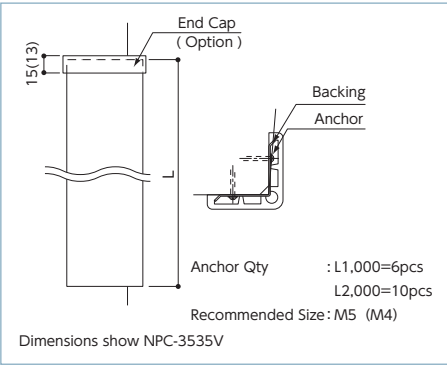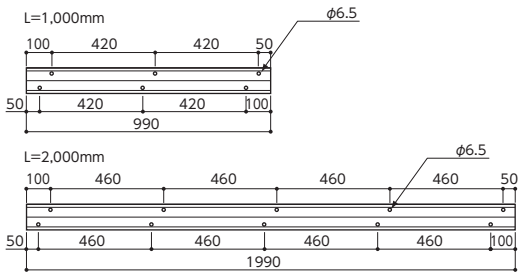


NPO type




Specifications

Material / Soft Resin
Subframe / Steel

Color Variation





Section

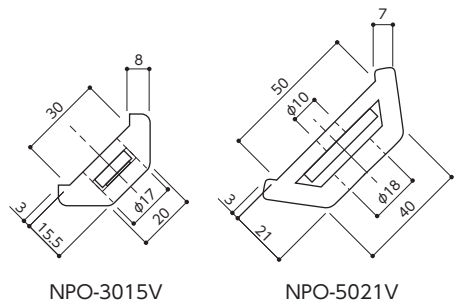

Model No.	Length (mm)
NPO-3015V	1,000
	2,000
NPO-5021V	1,000
	2,000

Subframe

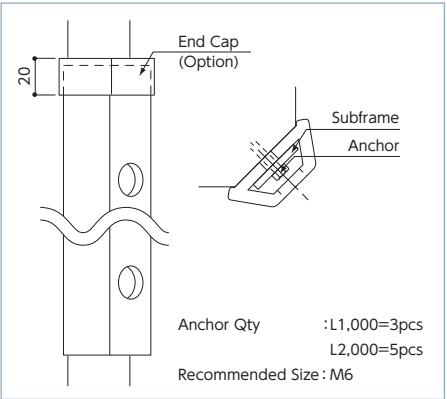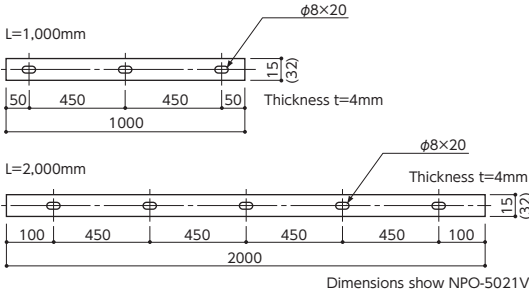


NCD type




■ Specifications
Material / Synthetic Rubber (Black)
Subframe / Steel

■ Section

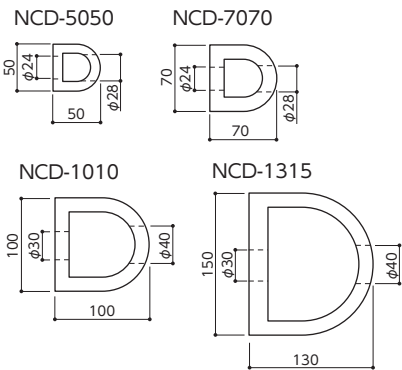

Model No.	Length (mm)
NCD-5050	3,000
NCD-7070	3,000
NCD-1010	3,000
NCD-1315	2,000

Model No.	Length (mm)
NCD-1010Y	3,000
NCD-1315Y	2,000

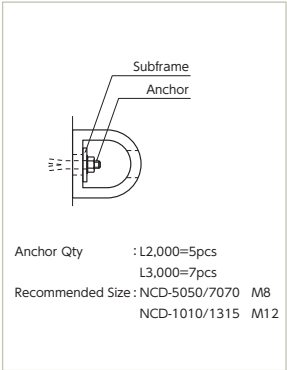


NCD-Y type With Yellow Line




■ Specifications
Material / Black Part : Synthetic Rubber
 Yellow Line Part : Synthetic Rubber
Subframe / Steel


■ Section

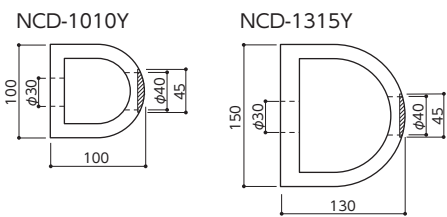

■ Hole Pitch

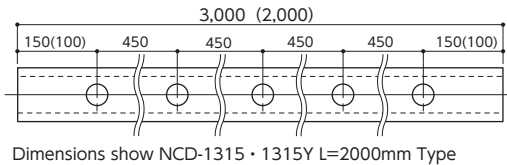

■ Subframe

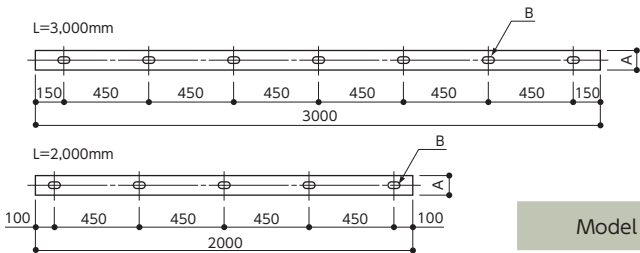

Model No.	Dimension A (mm)	Dimension B (mm)
NCD-5050	30	$\phi 10 \times 20$
NCD-7070	40	$\phi 10 \times 20$
NCD-1010 / 1010Y	50	$\phi 18 \times 30$
NCD-1315 / 1315Y	50	$\phi 18 \times 30$

Option(NCD / NCD-Y)

■Outer Corner Cap
(for NCD-1010-1315)

15R
50
 $\phi 30$
100(130)
 $\phi 40$
284
Dimensions show NCD-1315

■End Cap
(for NCD-1010)

100
100
5

■Hole Cover(Anchor)
(for NCD-1010-1315)

25
47
53

NCD-MK type (With Slits)

New Release




Specifications


Material / Synthetic Rubber (Black)

Section

NCD-1010MK




NCD-1315MK




Hole Pitch (Anchor pitch)

NCD-1010MK




NCD-1315MK



- Mitigate shock to main body
- Reduce the load on the fixing anchor

Model No.	Length (mm)
NCD-1010MK	2,000
NCD-1315MK	1,000

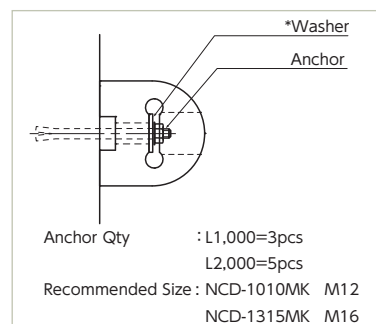

*Washer (by other)

NCD-M type




Specifications


Material / Synthetic Rubber (Black)

Section

NCD-1010M




NCD-1315M




Hole Pitch (Anchor pitch)


NCD-1010M



NCD-1315M



Model No.	Length (mm)
NCD-1010M	2,000
NCD-1315M	1,000

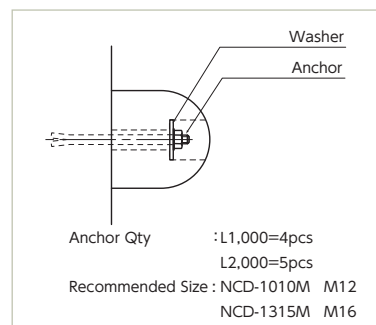

NCK type




Specifications


Material / Synthetic Rubber (Black)

Subframe / Steel

Hole Pitch (Anchor pitch)


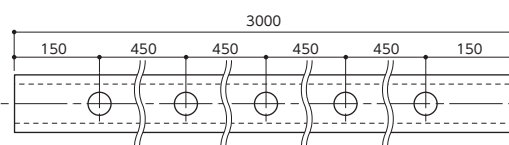


Subframe

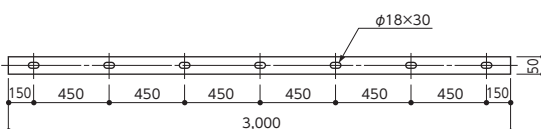

Model No.	Length (mm)
NCK-1010	3,000

Section Detail

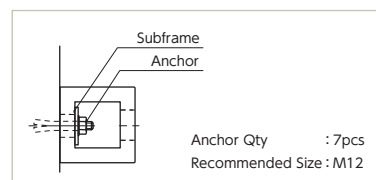

NH type




■ Specifications
Material / Soft Resin

■ Color Variation

Lemon Yellow Ivory White

Model No.	Length (mm)
NH-2239	2,000
NH-2946	2,000
NH-3446	2,000

■ Section

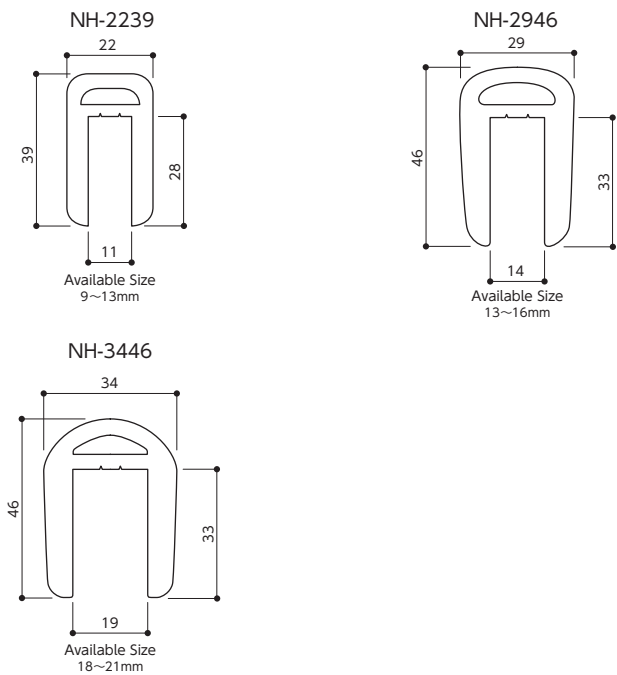


Dimension A	Applicable Size (mm)	Model No.
6mm	5 ~ 7	★
9mm	7 ~ 10	★
11mm	9 ~ 13	NH-2239
14mm	13 ~ 16	NH-2946
19mm	18 ~ 21	NH-3446
22mm	21 ~ 23	★


★ Is option

Corner Guard


RC Foundation + Mortar

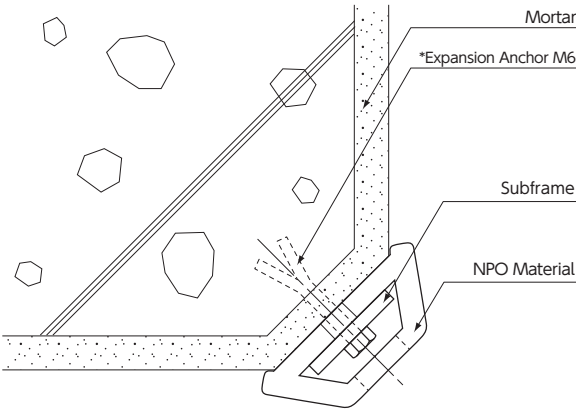


RC Foundation + GL Construction Method

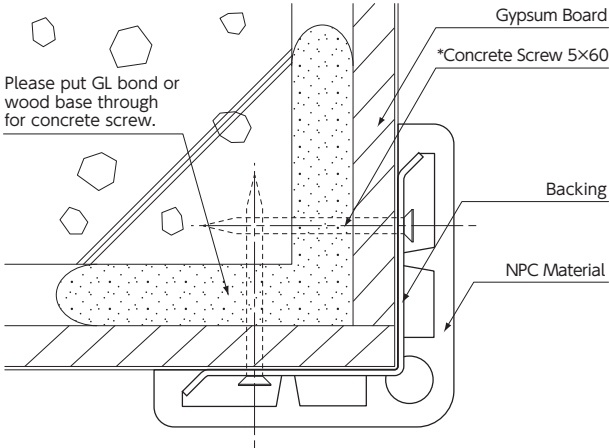

CB Foundation + Mortar

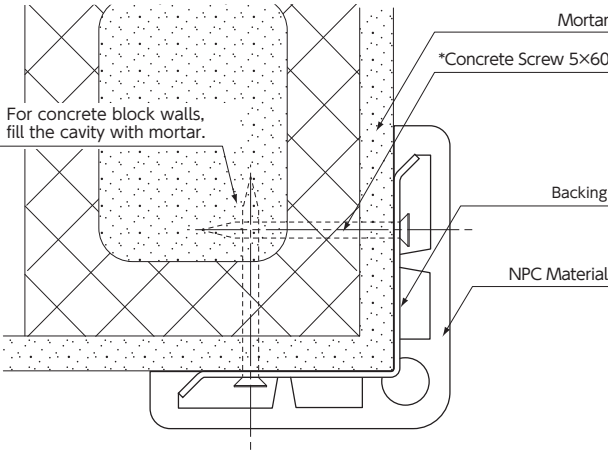


LGS Foundation + Gypsum board(Double Layer)

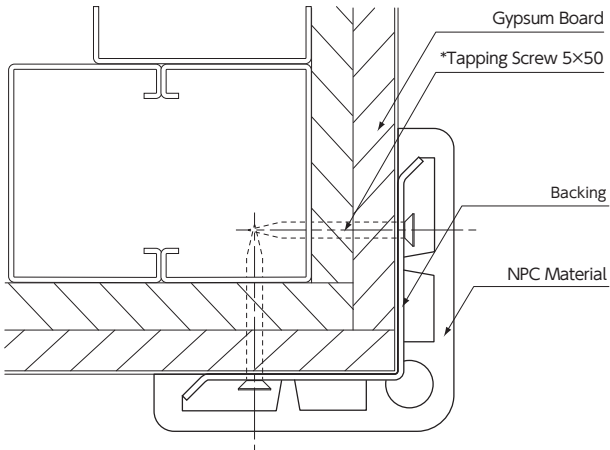


Car Stopper

RC Wall

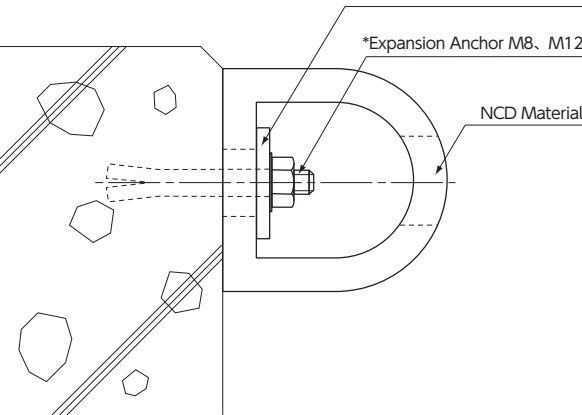

RC Wall

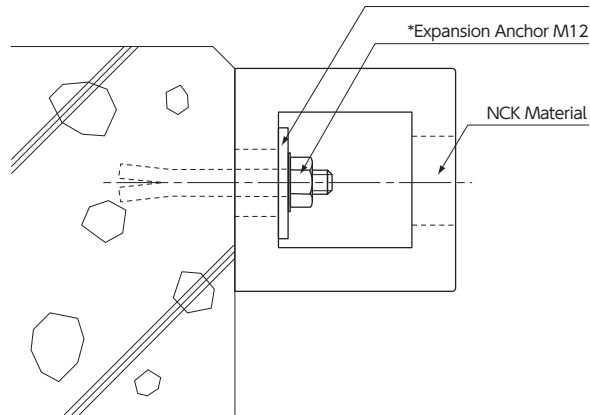



JAPAN (HEAD OFFICE)

Add: 3/F, Nihon Seimei Ueno Building, 2-18-10, Higashi Ueno, Taito-ku, Tokyo, 110-0015 Japan.
Tel: +813 58177410 Fax: +81 3 58177420
Web : <http://www.naka-kogyo.co.jp/>

SINGAPORE

Add: 60 Albert Street, #08-11, OG Albert Complex, Singapore 189969.
Email: Info@nakacorp.com.sg
Tel: +65 6635 3393 Fax: +65 6635 3398

HONG KONG

Add: No.2 G/f, Wah Wai Centre, 38-40 Au Pui Wan Street, Fo Tan, New Territories, Hong Kong
Tel: +852 2566 8018 Fax: +852 2512 8278